



Thermafiber® RainBarrier® 45

Mineral Wool Continuous Insulation

PRODUCT FEATURES

Description

Mineral wool semi-rigid continuous insulation with fire resistive, acoustic, and moisture resistive properties.

Basic Uses/Related Uses

Continuous insulation for use on exterior above grade rainscreen and cavity wall construction applications. Suitable for use with common z-girt, wall-tie, and clip cladding attachment solutions with open or closed joint facades.

Selection Criteria

- Non-combustible, non-deteriorating, and inorganic
- Repels and efficiently drains water
- Highly UV resistant

- Helps conserve energy, reduce greenhouse gas emissions
- Fire resistant to temperatures above 1,093° C (2,000° F)
- Enhances acoustical performance
- Compatible with common wall ties, clip systems, and air/moisture barriers

Sustainability Criteria

- Recycled content minimum 70%, standard fiber
- Transparency Documentation Available - Health Product Declaration
- Contributes to credits in several green building programs such as LEED® and Green Globes®
- For more information see Environmental Product Declaration (EPD) certified by UL Environment via www.thermafiber.ca/sustainability

Applicable Standards

CAN/ULC-S702	Standard for Mineral Fibre Thermal Insulation for Buildings
ASTM C665	Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
ASTM C612	Standard Specification for Mineral Fiber Block and Board Thermal Insulation
ASTM C518	Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus
CAN/ULC-S114	Standard Method of Test for Determination of Non-combustibility in Building Materials
ASTM E136	Standard Test Method for Behavior of Materials in a Vertical Tube Furnace at 750°C
CAN/ULC-S129	Standard Method of Test for Smoulder Resistance of Insulation (Basket Method)
CAN/ULC-S102	Standard Method of Test for Surface Burning Characteristics of Building Materials and Assemblies
ASTM E84	Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM C1104	Standard Test Method for Determining the Water Sorption of Unfaced Mineral Fiber Insulation
ASTM E96	Standard Test Methods for Water Vapor Transmission of Materials
ASTM C1338	Standard Test Method for Determining Fungi Resistance of Insulation Materials and Facings
ASTM C795	Standard Specification for Thermal Insulation for Use in Contact with Austenitic Stainless Steel
ASTM C423	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

Performance Criteria

Compliance	Evaluation Listing No. 14060-L Type I Type IA, IB, IVA, IVB	CCMC CAN/ULC-S702 ASTM C612																																								
Density	72 kg/m ³ (4.5 lbs/ft ³)	Actual																																								
Thermal	RSI value/25.4 mm @ 24 °C 0.74 m ² *K/W R-value/inch @ 75 °F 4.2 hr*ft ² *°F/Btu	ASTM C518																																								
Fire	Non-Combustible Non-Combustible as defined per NFPA Standard 220 Smoulder Resistance Mean Mass Loss ≤ 0.02% Flame Spread 0; Smoke Developed 5 Flame Spread 0; Smoke Developed 0	CAN/ULC-S114 ASTM E136 CAN/ULC-S129 CAN/ULC-S102 ASTM E84																																								
Moisture	Moisture Absorption 0.03% by volume Water Vapour Permeance 2850 ng/Pa.s.m ² (50 perms) Fungi Resistance - Pass	ASTM C1104 ASTM E96 ASTM C1338																																								
Corrosion	Austenitic Steel - Non-corrosive Steel, Aluminum & Copper - Non-corrosive	ASTM C795 ASTM C665																																								
Acoustic	<table border="1"> <tr> <th>Thickness</th> <th>125 Hz</th> <th>250 Hz</th> <th>500 Hz</th> <th>1000 Hz</th> <th>2000 Hz</th> <th>4000 Hz</th> <th>NRC</th> </tr> <tr> <td>38 mm (1½")</td> <td>0.22</td> <td>0.44</td> <td>0.96</td> <td>1.06</td> <td>1.05</td> <td>1.05</td> <td>0.90</td> </tr> <tr> <td>51 mm (2")</td> <td>0.30</td> <td>0.69</td> <td>1.08</td> <td>1.01</td> <td>1.00</td> <td>1.03</td> <td>0.95</td> </tr> <tr> <td>76 mm (3")</td> <td>0.70</td> <td>1.07</td> <td>1.24</td> <td>1.13</td> <td>1.07</td> <td>1.08</td> <td>1.15</td> </tr> <tr> <td>102 mm (4")</td> <td>1.03</td> <td>1.25</td> <td>1.20</td> <td>1.05</td> <td>1.05</td> <td>1.08</td> <td>1.15</td> </tr> </table>	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC	38 mm (1½")	0.22	0.44	0.96	1.06	1.05	1.05	0.90	51 mm (2")	0.30	0.69	1.08	1.01	1.00	1.03	0.95	76 mm (3")	0.70	1.07	1.24	1.13	1.07	1.08	1.15	102 mm (4")	1.03	1.25	1.20	1.05	1.05	1.08	1.15	ASTM C423
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC																																			
38 mm (1½")	0.22	0.44	0.96	1.06	1.05	1.05	0.90																																			
51 mm (2")	0.30	0.69	1.08	1.01	1.00	1.03	0.95																																			
76 mm (3")	0.70	1.07	1.24	1.13	1.07	1.08	1.15																																			
102 mm (4")	1.03	1.25	1.20	1.05	1.05	1.08	1.15																																			

Sizes


Thickness [†]	Widths	Lengths
25 mm (1") - 178 mm (7")	406 mm (16") 610 mm (24") 914 mm (36")	1219 mm (48") 1524 mm (60")

[†]Available in 12.7 mm (1/2") increments





Thermafiber® RainBarrier® 45 Mineral Wool Continuous Insulation

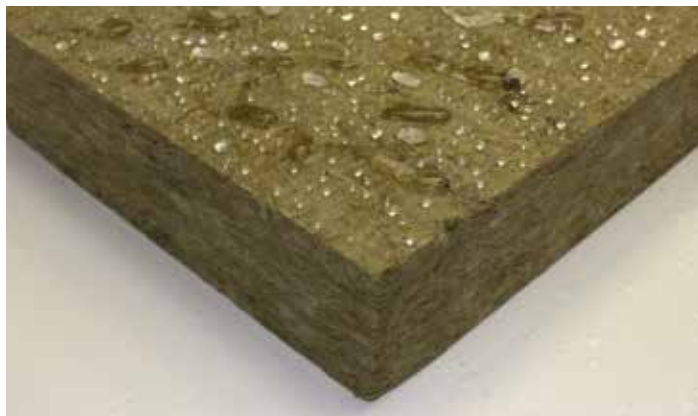

Quality Statement, Tests, Certifications, and Approvals

Recycled content verified by ICC-ES.

Delivery and Storage

Deliver products in their original packages, and store in enclosed shelter.

Limitations

If insulation is going to be left exposed for long durations prior to cladding installation, with extended exposure to the elements, consider installing higher density Thermafiber® RainBarrier® HD Continuous Insulation. Packaging is not UV resistant. Shelter unused packages from the elements.

Safety

Contact with mineral wool may cause temporary eye and skin irritation. Wear eye protection and long-sleeved loose fitting clothing closed at the neck and wrists. For additional information refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>.

Current Ed: 2021-07-01
Previous Ed: 2020-01-15

Disclaimer of Liability

Thermafiber, Inc. shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Thermafiber, Inc. liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing within thirty (30) days from date it was or reasonably should have been discovered.

LEED® is a registered trademark of the U.S. Green Building Council.
Green Globes® is a registered trademark of Green Building Initiative, Inc.

Availability/Cost

Contact Owens Corning local Area Sales Manager.
See ASM territory map via www.thermafiber.ca/contact.

PRODUCT PROPERTIES

Materials

Mineral wool, Type I (to CAN/ULC-S702), non-combustible (to CAN/ULC-S114), non-corrosive (to ASTM C665).

PRODUCT PLACEMENT

Installation

- For installation information, please see “Thermafiber® RainBarrier® Insulation Guide - Canada” (Pub. No. 600060).
- For easy cutting use a serrated knife or contact Owens Corning for recommendations.

Technical Services Available

For Canadian Thermafiber® Technical inquiries, please contact our technical team at www.thermafiber.ca/contact.



THERMAFIBER, INC.
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659

1-800-GET-PINK®
www.thermafiber.ca

Pub. No. 600000D Printed in Canada. July 2021.
THE PINK PANTHER™ & © 1964–2021 Metro-Goldwyn-Mayer Studios Inc.
All Rights Reserved. The colour PINK is a registered trademark of Owens Corning.
© 2021 Owens Corning. All Rights Reserved. © 2021 Thermafiber, Inc.
All Rights Reserved.

